
Root Severance Diagram

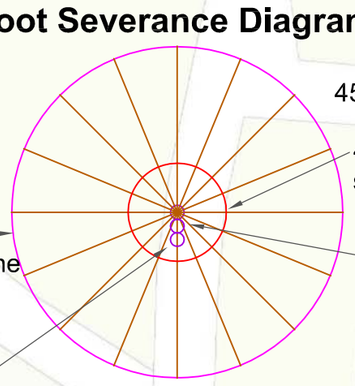

StoneMason's Yard

The Courthouse

Courthouse Museum Gardens

Minster Gardens

The Old Court House

The Old Deanery

MINSTER ROAD

T1-B2 (T29)
T2-U (T28)
T3-B2 (T27)
T4-B2 (T26)
T5-B2
T6-B2 (T25)
T9-B2 (T23)
T21-B2 (T19)
T22-B3 (T14)
T23-A3 (T13)
T24-B2 (T12)
T26-B2 (T11)
T17-A2 (T15)
G25-C2
G27-C2
S28-C2
T32-B2 (T40)
T34-B2
T35-C1
T36-B1 (T36)
T37-C2 (T31)
T38-B2 (T30)
T39-U (T32)
T40-B2 (T33)
T41-C1
T42-B2 (T34)
T43-B2 (T35)

0.94m
2.41m
2.93m
2.34m
6.95m
1.23m
9.18m
5.2m
2.98m
6.93m
0.48m
4.4m
1.59m

Pile Root Severance % = Radial Severance Length x 0.45 / Root Protection Area x100

Pile Root Severance % = (0.94 +2.41+2.93+2.43+6.95+1.23+9.18+5.2+2.98+6.93+0.48+4.4+1.59)x.45/707x100=3%

N

Level Site Proposed
1 : 200

0 2 4 6 8 10m
SCALE 1: 200

All drawings to be read in conjunction with information provided by Design Team and Arboriculturist. Any landscaping design shown is superceded by Alistair W. Baldwin's information.

P4	Planning issue final submission.	08/11/24	RS	CB
P3	Final Planning issue.	20/09/24	RS	CB
P2	Planning issue.	30/08/24	RS	CB
P1	Preliminary WIP issue.	09/08/24	RS	CB
	Revision	Date	By	Ch

All dimensions to be verified on site, and the Architect informed of any discrepancy. All drawings and specifications should be read in conjunction with Health and Safety Plan, all conflicts should be reported to the appointed Principal Designer.

Ripon Cathedral; land adjacent
Ripon Renewed
Minster Rd, Ripon, HG4 1QT

Sheet Name: Proposed Site Layout

Purpose of issue: Planning Status:

Date: Aug 2024 Checked by :

Drawn by: RS Scale @ A2 : As indicat

Project No: 8896 Revision: P

Drawing No: 8896-BOW-ZZ-ZZ-DR-A-P03

BOWMANRILEY
ARCHITECTS • BUILDING CONSULTANTS • INTERIORS